


TrueCut 360°

Instructions

Thank you for purchasing the **TrueCut 360°**! We know it will be a fun and effective way to get the perfect circles you need for your projects. These instructions will help you get started, and teach you about the important features of the TrueCut 360°. It is recommended you keep these instructions handy and refer to them when needed.

Before You Cut! (Blade Cover)

Blade Cartridge

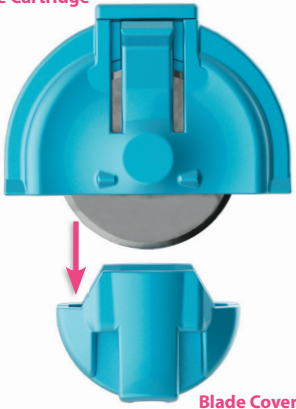

Blade Cover

The blade comes with a blade cover installed. Instructions on the back will show you how to remove the blade cover when you are ready to begin cutting. Keep the cover, as you will need it if you want to replace the blade cartridge.

Warning: Always make sure the blade cover is on before removing or replacing the blade cartridge.

Safety Lock

The clear plastic safety lock can be slid to the **Lock** or **Unlock** position. When it is in the **Lock** position, the blade will not be able to come all the way down to cut. Slide the safety lock to the **Unlock** position to cut.




Adjusting The Circle Size

1. Unlock the sizing knob by rotating its base counter-clockwise, until the knob can slide freely.

2. Slide the knob up or down the cutter to the desired length. The red line underneath the knob indicates the circle size.

3. Lock the sizing knob in place by rotating its base clockwise until tight.

Sizing Knob

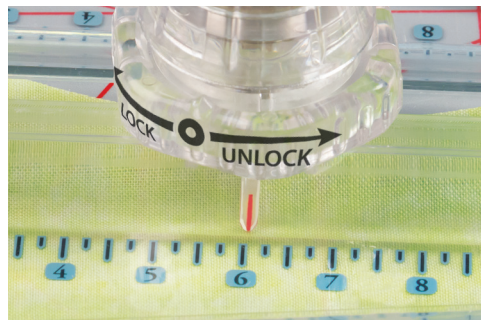


Sizing Knob



Cutting Circles



1. The best circles are cut with a single smooth motion, without stopping and starting again. Place one hand on the sizing knob. The sizing knob will be the center of your circle.

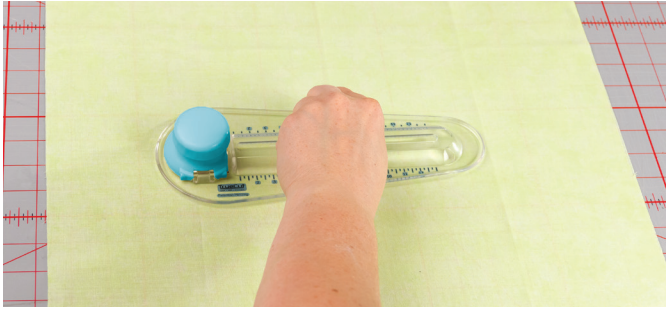

2. Place your free hand on the blade knob, crossing over your other arm.



3. Apply pressure to the blade and sizing knobs, and in one smooth motion, rotate the blade knob in a full circle.

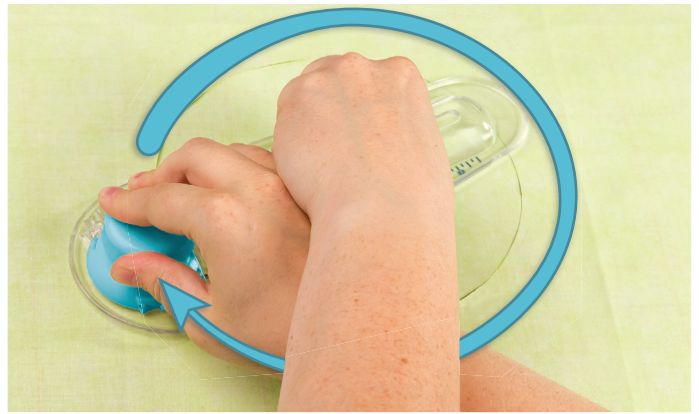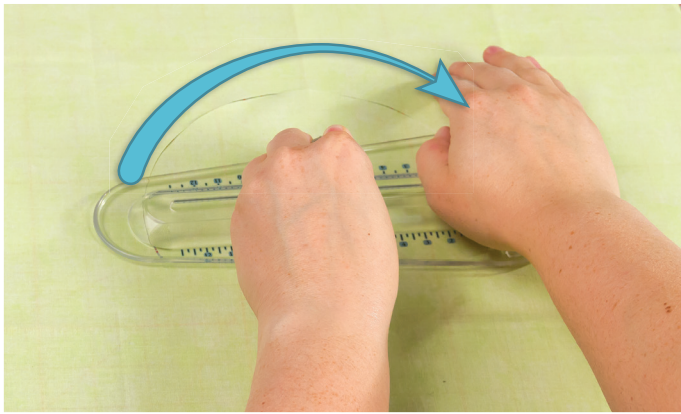


Changing The Blade (additional blade cartridges sold separately)

Warning: Always make sure the blade cover is on before removing or replacing the blade cartridge.


1. While pushing the release lever to the side, lift up on the blade knob and reveal the blade.



2. Make sure the blade cover is on, and then remove the old blade by pulling it out of the TrueCut 360°.

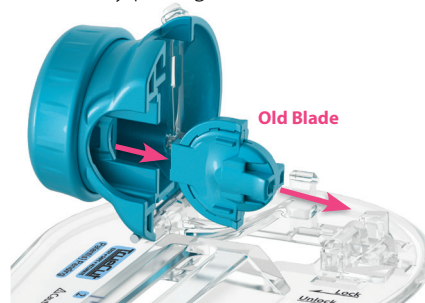

3. Insert the new blade until it clicks in place.

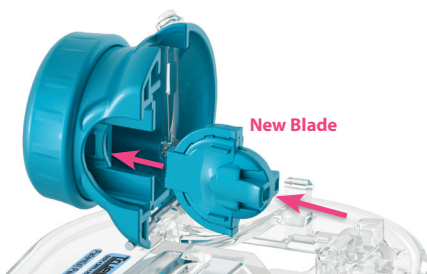

4. Remove the blade cover by twisting a little and pulling. Keep it in a safe place.

