# BABY LOCK SERGER ACCESSORIES

## Double Fold Bias Binder

1-1/8 inch (28mm) (BLE8-S3) 1-1/2 inch (36mm) (BLE8-S2)

### **Instructions**

This conventional binder will double fold and sew bias strips to your project in one quick step on the Evolve, using either a chain or coverstitch. Choose from two widths based on your preference.

#### **MACHINE SETTINGS**

Stitch type: 1-1/2"	Chain Stitch - C3 Needle Position C2-C3 Narrow Right Cover Stitch C2-C3
Stitch type: 1-1/8"	Narrow Right Cover Stitch Chain Stitch - C3 Needle
Stitch length:	3-4
Upper looper:	Down
Upper knife:	Disengaged "LOCKED"
Sewing table:	On

#### **Bias Strip Cut Size:**

1-1/8 inch Binder:

- Cut 1-1/8 inch bias from fine fabrics such as calico, muslin, etc.
- Cut 1 inch wide for medium weight fabrics such as trigger, lightweight denim.

1-1/2 inch Binder:

- Cut 1-3/8 inch for fine fabrics such as calico, muslin, etc.
- Cut 1-1/4 inch wide for medium weight fabrics such as trigger, lightweight denim.


**Note:** Test with fabric strip to make sure of correct width of bias

**Note:** When using BLCS the accessory adaptor BLCS-AA is needed.



#### Instructions:

- 1. Secure attachment to table with guide fixing screws.
- 2. Cut fabric strips to size needed.
- 3. Raise presser foot. With the point of the bias strip, place strip into attachment. Use tweezers to feed the strip into the attachment.
- 4. Place the folded bias up to the needles and under the presser foot.
- 5. Turn the handwheel 3-4 times to secure the stitching in the fabric.
- Place the fabric that is to be bound into the slot of the attachment. Place in the folded bias in front of the presser foot.
- 7. Loosen the guide fixing screws and move the attachment right or left to align the attachment with the needle position.
- 8. Sew test for proper alignment before sewing on project.

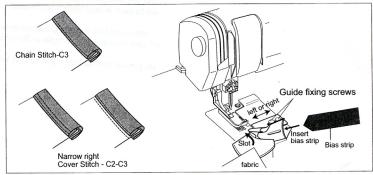



FOR THE LOVE OF SEWING