



edge finishes — hong kong

An elegant seam finish for unlined garments or loosely woven fabrics.


1. Cut 1"-wide bias strips from a light-weight fabric. Select a center straight stitch attach the 1/4" patchwork foot. Using the edge of the foot as your guide, with right sides together and matching the edges, stitch the bias strip to the edge of one side of the seam allowance. (#1)

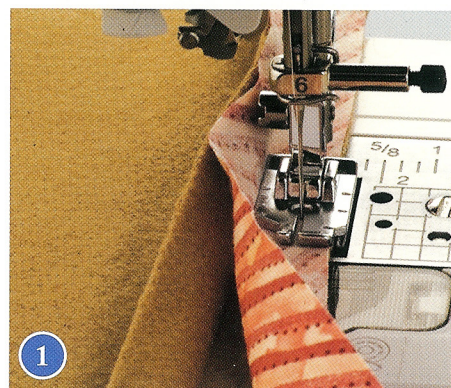


2. Wrap the bias strip around the edge of the seam allowance edge and press to the other side. Pin. (#2)

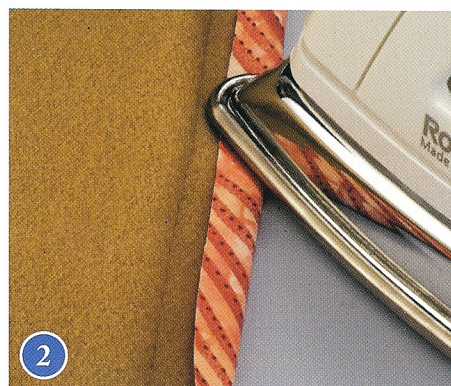

3. Replace the 1/4" patchwork foot with the edge joining foot. From the right side, position the blade in the "ditch" or seam and sew. The binding will be sewn in place. (#3)



1/4" Patchwork Foot



**and
Edge Joining Foot**

Stitch: *Straight (center)*

Width: *Pre-set*

Length: *Pre-set*

Tension: *Pre-set*

Fabric, needles, notions required:

Fabrics of choice; universal needle, 80/12; all-purpose polyester thread for needle and for bobbin

FOOT FACTS

The 1/4" patchwork foot or the 1/4" patchwork foot with guide can be used to sew the bias strip to the seam allowance. Just place the blade of the patchwork foot along the edges and sew.