



edge finishes — wired edge

Create wired ribbon or add stiffness and flexibility to an edge with wire or fishline.

1. Snap on the pintuck or 5-hole cording foot. Thread a piece of wire or fishline through the center groove on the pintuck foot or in the center hole on the cording foot. Position the fabric edge under the foot and slightly to the right of the wire or fishline. (#1 & #2)

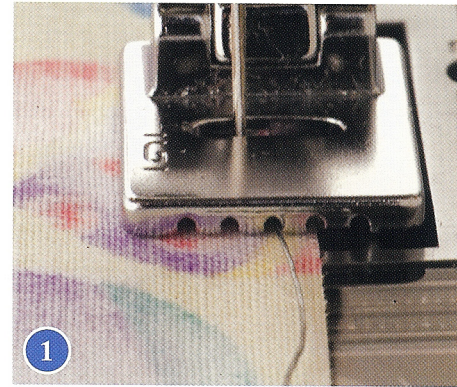

2. Begin sewing catching the wire or fishline in the roll of the fabric. The right zigzag should sew off the edge of the fabric causing the fabric to roll around the wire or fishline. (#3)

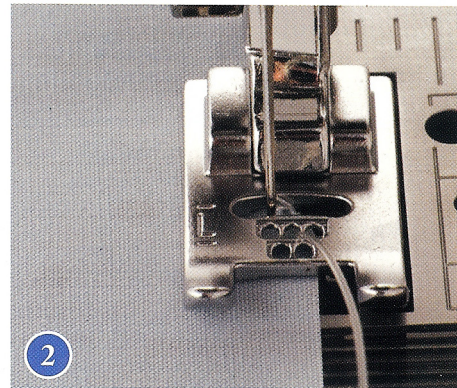

**5-hole
Cording
Foot**

or



**Pintuck
Foot**

Stitch: Zigzag

Width: 3.5mm

Length: 0.9-1.4mm

Tension: Pre-set

Fabric, needles, notions required:

Cotton fabrics; universal needle, 80/12; all-purpose polyester thread for needle and for bobbin