


seams — double stitched

A narrow seam with an added overlock stitch used along the edge to control raveling.



1. Seam a traditional 5/8" seam allowance. (#1)

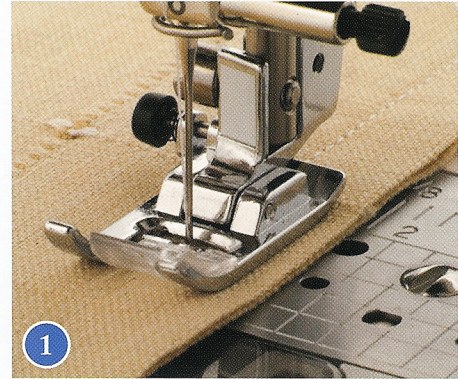

2. Use the edge of your presser foot as your guide along the edge of the previous seam and sew an overcast stitch. (#2)



3. Trim the excess seam allowance away up to the edge of the overcast stitching. (#3)

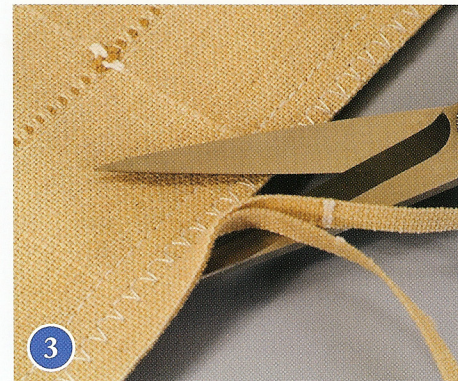

Standard Foot

Stitch: *Straight*

Width: *Pre-set*

Length: *Pre-set*

Tension: *Pre-set*

Fabric, needles, notions required:

Fabrics of choice; universal needle, size 80/12; all-purpose sewing thread for needle and bobbin

FOOT FACTS

If a wider seam allowance is desired on heavier fabrics, using the overcast foot along the edge of the seam allowance and an overcast stitch, sew the edge. No trimming is necessary using this technique.