


# Camisole and Shorts



*Huskylock™*

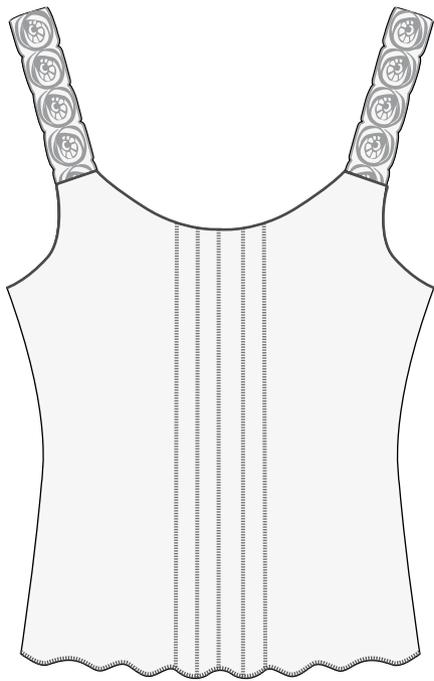

## Sewing Supplies

- Kwik Sew Pattern 2589
- Lightweight gray silk fabric (for amount see sewing pattern)
- Sewing thread to match the fabric
- 40 wt. Rayon embroidery thread (for the pin tucks and rolled edges)
- 40 wt. Rayon embroidery thread (for embroidery)
- Gray overlock thread
- Pins

## HUSQVARNA VIKING® Accessories

- HUSQVARNA VIKING® HUSKYLOCK™ Overlock Machine
- HUSQVARNA VIKING® Sewing and Embroidery Machine
- 20" x 5 1/2 yd" (50cm x 5m) INSPIRA® Aqua Magic Water Soluble stabilizer  
140002165 (USA)  
5000031-96 (Europe)
- HUSQVARNA VIKING® Embroidery Collection 208  
#920 231-096
- HUSQVARNA VIKING® Endless Embroidery Hoop 170 x 100  
#920 051-096
- Pictogram Pen  
#412 08 38 -48

You can find these and many other accessories in the HUSQVARNA VIKING® Accessory User's Guide or on our website [www.husqvarnaviking.com](http://www.husqvarnaviking.com), for purchase at your nearest HUSQVARNA VIKING® Dealer.

Cut out the camisole and shorts pattern, in the correct size. 1/4" (6mm) seam allowances are included in the pattern

## Cut

Cut all pieces from the gray silk fabric except the shoulder straps and front piece. You will stitch the pin tucks in the front camisole piece before cutting out the piece

To create get a lettuce edge on the camisole and shorts, cut all pieces on bias of the fabric.

## Embroider

Lace Shoulder straps:

Set your sewing machine and embroidery machine for embroidery.

Thread with embroidery thread on the top and bobbin thread in the bobbin. Snap on your "R" foot.

Hoop water soluble stabilizer in the 170 x 100 Endless Hoop. Choose design # 5.

Embroider the design according to the instructions in the Embroidery Booklet.


Continue to embroider lace for the shoulder straps in the Endless Hoop.

Repeat the design to achieve the required length. When finished, rinse the embroidery in lukewarm water to remove the stabilizer. Let dry and press all the lace flat.

## Sew

### Camisole:

Pin tucks: Before cutting out the camisole pieces, measure, mark and sew the pin tucks on the front piece. Using a Pictogram pen and the front pattern piece, mark the shape of the neck opening. Starting in the center of the neck opening, mark the placement of 5 pin tucks with 3/4" (2cm) distance as illustrated.

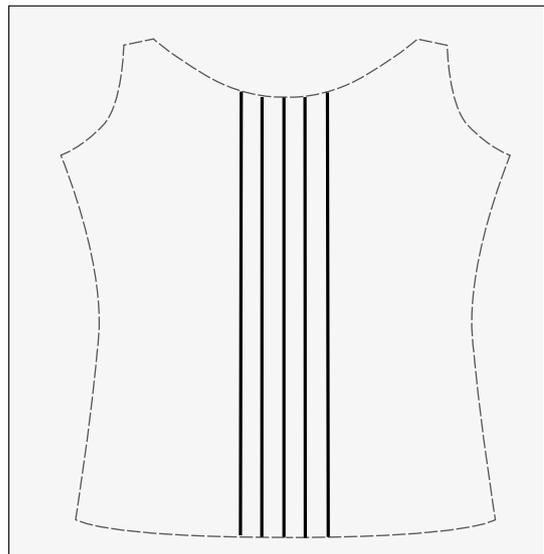

Set your HUSKYLOCK™ for a 3-thread narrow edge. Disengage the knife. Thread the machine with 40 wt. embroidery thread. Fold the fabric along the marked line, wrong sides together and press. Sew a narrow rolled edge along the folded edge. Continue to sew a narrow rolled edge on all marked lines in the same way. Place the pattern piece over the pintucked fabric. Match center front and cut out the front piece.

**Rolled edge:** Finish the hem on the camisole and shorts with a 3 thread rolled edge. Set your HUSKYLOCK™ for a 3-thread rolled edge. Engage the knife and sew a rolled edge along the edge of the hem, trimming as you sew.

**To create a lettuce edge:** Reduce the differential feed setting or slightly pull the fabric in front of the presser foot. Test sew on a piece of fabric before sewing on your garment.

Follow the sewing instructions in the pattern to finish the Camisole and Shorts.

***Finished!***