



Evening Bag



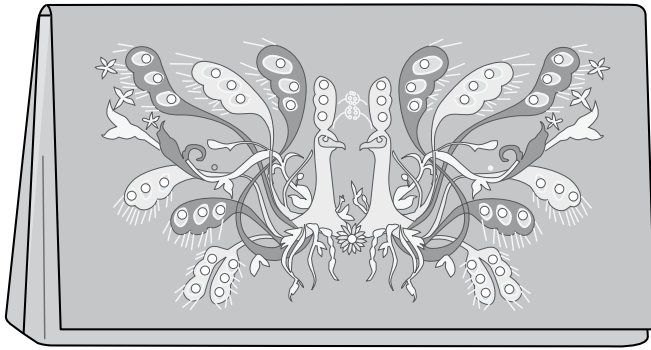

Sewing supplies

-  HUSQVARNA VIKING® DESIGNER DIAMOND™ sewing and embroidery machine
-  Red duchesse silk fabric 16" x 24" (40 x 60 cm)
-  Red lining 12" x 20" (30 x 50 cm)
-  Heavy fusible interfacing 12" x 20" (30 x 50 cm) (Sulky Fuse'n stitch, North America) (Sulky Ultra Strong Stable #620 00 37-96, Europe)
-  Tear Away stabilizer
-  Rayon embroidery thread
-  Red sewing thread
-  Bobbin thread
-  1 magnetic closure
-  Pins
-  Decorative Touch Wand
-  Swarovski crystals

Husqvarna Viking® Accessories

- DESIGNER® Crown Hoop 260 x 200 (10 1/4" x 8") #4131165-01

You can find these and many other accessories in the HUSQVARNA VIKING® Accessory User's Guide or on our website www.husqvarnaviking.com, for purchase at your nearest HUSQVARNA VIKING® Dealer.

Cut

3/8" (1 cm) seam allowance is included in all measurements.

From red duchesse silk:

- 16" x 24" (40 x 60 cm)

From red lining:


- 12" x 20" (30 x 50 cm)

From Heavy fusible interfacing:

- 12" x 20" (30 x 50 cm)

Embroider

Mark the starting point for the embroidery.

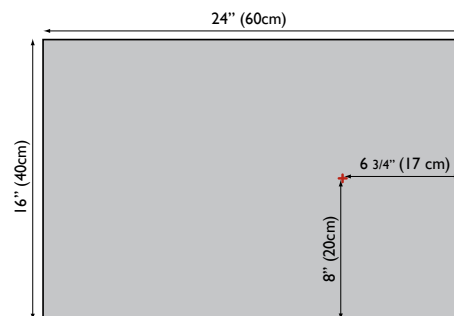


Hoop the fabric in the 260 x 200 hoop with tear away stabilizer underneath. Select design #35 and embroider. Tear away the stabilizer.




Sew

Make a paper pattern piece from tracing paper 12" x 20" (30 x 50 cm). Divide the piece in 3 sections to create a front, back and flap. Place the pattern piece on top of the fabric with the embroidery centered in one of the sections as illustrated. Cut out the bag piece the size of this pattern. Mark the edges at the section lines.

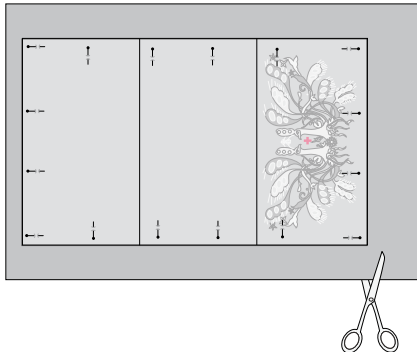


Press the heavy fusible interfacing onto the wrong side. Place the lining right sides together with the front piece.

Thread with sewing thread on top and in the bobbin. Snap on "A" foot. Select Medium weight fabric on the Sewing Advisor and touch Seam. Sew around the pocket flap between the markings. Make a snip in the seam allowance at the ends of seam.




Turn right side out and press. Sew the rest of the bag piece and lining wrong sides together. Touch Overcast on the sewing advisor and overcast the edges. Fold the bag according to

the illustration and sew the side seams of the bag with straight stitch.



Fold the corners according to illustration and sew the corners.



Turn right side out and press.

Sew the magnetic closure inside the bag flap.

Embellish

Use the Decorative Touch Wand to put hot fix Swarovski Crystals on the embroidery.